




## STRADA 38CM VESSEL BASIN

### TEMPLATE AND INSTALLATION INSTRUCTIONS

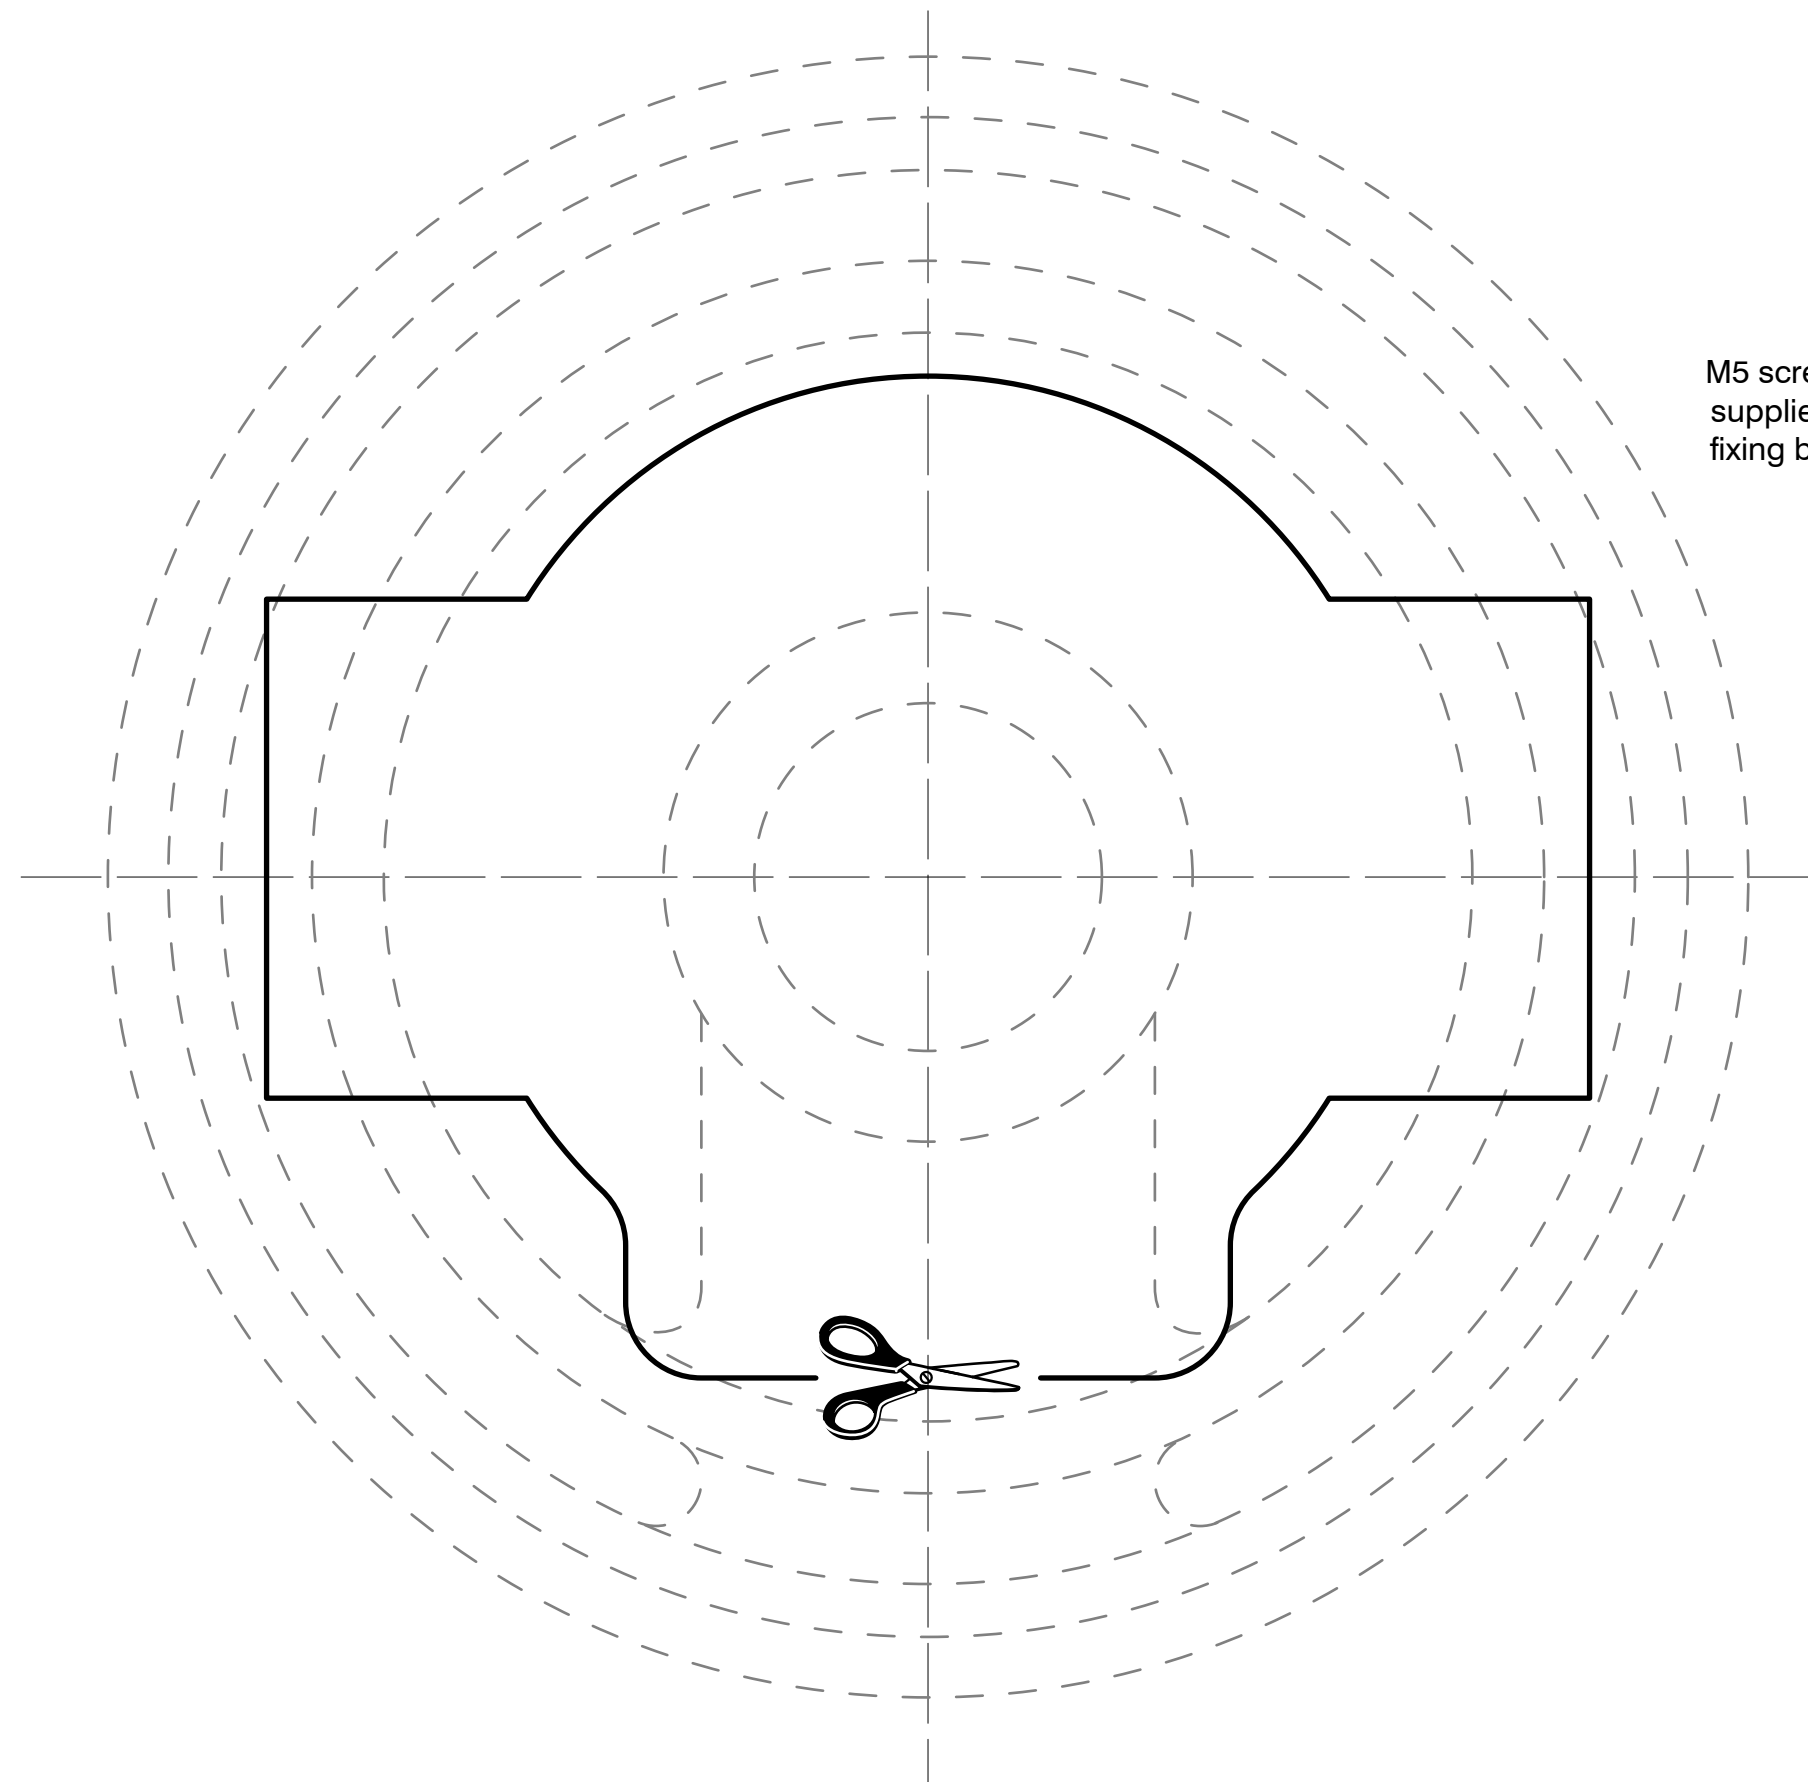





Waterproof sealant not supplied.

Ideal Standard pursues a policy of continuing improvement in the design and performance of its products. The right is, therefore, reserved to vary specifications without notice.

The Bathroom Works,  
National Avenue,  
Kingston upon Hull.  
HU5 4HS. England.  
Telephone: (01482) 346461 Telefax: (01482) 445886

Ideal Standard (UK) Ltd.

**Customer Care Helpline 0870 1296085**  
**Customer Care Fax Line (01482) 499611**  
**email : ukcustcare@IdealStandard.com**

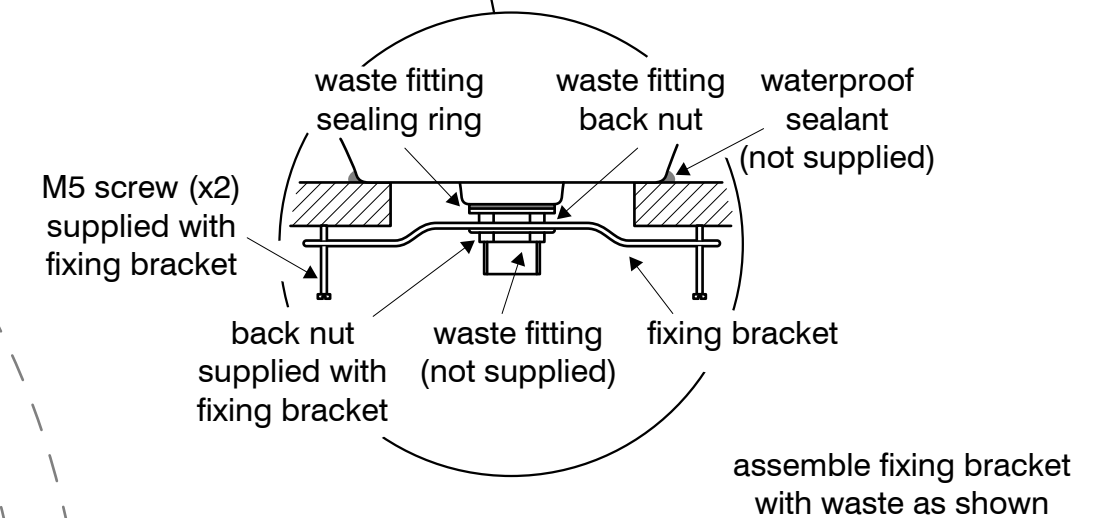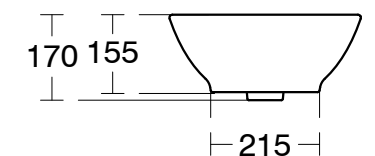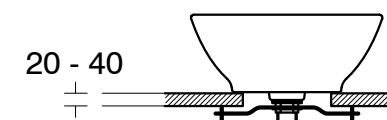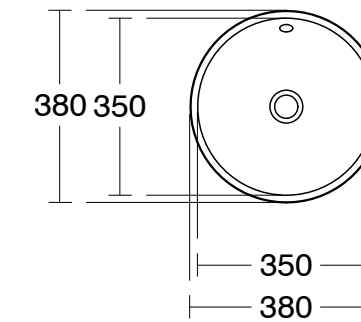

### INSTALLATION INSTRUCTIONS

1. Position template on countertop and mark off.
2. Cut hole in countertop to template size,
3. Apply waterproof sealant to the rim of the basin and the countertop. Ensure good coverage over the entire mating surfaces.
4. Locate the basin on to the countertop and press firmly all around the basin to achieve a good seal.
5. Fit waste (seal in with silicon sealant under waste flange)
6. Fit fixing bracket up against the waste back nut, and secure in place with the back nut supplied with the fixing bracket.
7. Tighten up the two M5 screws through the threaded holes in the fixing bracket.
8. Remove surplus sealant.

NOTE: Whether the countertop is to be tiled or finished in laminated plastics, it is recommended that the finished surface be extended under the basin rim.

**Waterproof sealant not supplied.**

**STRADA**  
**38cm Vessel**  
**K0832**  
**01/14**